

# STOIC

CLARITY | INNOVATION | VISION

STOIC Technologies 2.5" 5MP Mini IP  
Network PTZ, 4X Motorized Pan, Tilt and  
Zoom, 80IR, H.264, H.265

IPS-P25MZ5W



## SPECIFICATIONS:

<b>Model</b>	<b>IPS-P25MZ5W</b>
<b>Camera</b>	
Image Sensor	1/2.7" OV Low Illumination 5MP CMOS Sensor
Image Resolution	5MP
Compression	H.264/H.265
POE	Support(optional)
<b>PTZ</b>	
Horizontal Rotation Speed	0°~25°/s
Horizontal Rotation Range	55°~110°
Tilt Rotation Speed	0°~20°/s
Tilt Rotation Range	0°~90°
Auto Flip	Support
Ratio Speed	/
360° Scan	/
A-B Scan	/
Preset Points	16
Guard Tours	/
Guard Points	Max.16 points
<b>Lens</b>	
Focus Length	2.8mm--12mm
Focus Control	4X Optical Zoom
<b>Night Vision</b>	
Infrared LED	Φ 42x2PCS
IR Range	25m (80 Feet)
Day-night mode	Auto ICR
<b>Network</b>	



Network protocol	TCP/IP、HTTP、DHCP、DNS、DDNS、RTP、RTSP、PPPoE、SMTP、NTP、UPnP、P2P
ONVIF	Support
Network interface	Built-in RJ45 network interface,support 10M/100M IP DATA
Main Stream	5MP@15fps, 4MP@25fps
Sub Stream	640*480/480*360
MJPEG	2592*1944/1920*1080/ 1280*720
IE Browser	IE8-11, Chrome8+,Firefox3.5+,Safari5+

## Interface

Audio	/
Alarm	/

## General

Weatherproof	IP66
Operating Temperature	Indoor: 0°~ +40° Outdoor: -20°~ +60°
Operating Humidity	≤90% Non Condensing
Power	DC12V/2A
POE (Optional)	Power Consumption≤15.4Watts
Lightning Protection	TVS 3000V
Size of Package (LxWxH)	14x14x12.6(cm)
Weight	1.1Kgs

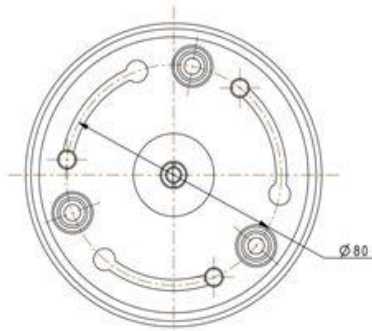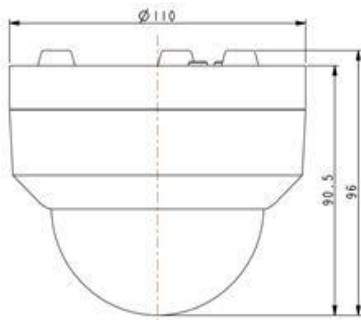

Shown with:  
**STH-P25WM** Wall Mount Bracket

[www.stoiccctv.com](http://www.stoiccctv.com)