

STOiC

CLARITY | INNOVATION | VISION

STOiC Technologies 5MP Starlight Dome Camera with 2.8MM Fixed Lens, IP66, Sony Starvis Sensor, 70IR, UTC, 4 in 1 Switchable



STH-D5M28W



SPECIFICATIONS:



Model NO.	STH-D5M28W
Video Output Mode	AHD/TVI/CVI/CVBS
Camera	
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Image Resolution	5MP
Effective Pixels	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080
TV System	PAL/NTSC
Electronic Shutter	Auto / Manual
S/N Ratio	≥50dB
Scanning System	Progressive Scan
Lens	
Focus Length	2.8mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	8M Pixels
Auto Iris Support	NO
Night Vision	
Infrared LED	14μ x 18PCS / IR Cut Filter (YES)
Infrared Distance	20M (70')

IR Power On / Off	Smart IR control
Camera Features	
Starlight	YES
Day/Night	YES
OSD Menu Language	YES
White Balance	AUTO / MANUAL
Gain Control	AUTO
Noise Reduction	3DNR
Picture Adjustment	YES
WDR	YES
OSD Support	YES
UTC	YES
General	
Housing	Metal, IP66
Bracket	NO
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Audio	Optional (See STH-B2061W)
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 550mA
Dimension	93(W) x 74(H)mm
Weight	400g



Additional Mounting Options:

MB-1061 Deep Base Junction Box
WM-D5500 Wall Mount Bracket

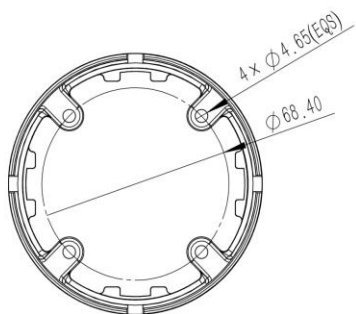

www.stoiccctv.com