

Access Control Terminal

DS-K1T802M




DS-K1T802M	
Processor	32bit
Storage	Storage for 3000 Legal Card Information and 10,000 Event Records
Communication type	TCP/IP
Card type	Mifare Card
Input interface	Exit Button x 1, Door Sensor x 1
Output interface	Doorbell x 1, E-lock Output x 1
Key board	13 Keys (0-9, *, #, Doorbell)
Display screen	STN Screen (Resolution 128x64)
LED Indicator	Communication / Status
Voice Prompt	Beeper
Working voltage	12VDC
Working current	0.17A (without Load)
Working Temperature	-20° C to 65° C (-4° F to 149° F)
Working Humidity	10% to 90%, non-condensing
Dimension	126.5mmx94.5mmx24mm (4.98" x 3.72" x 0.94")

FEATURES

- ◆ 32-bit high-speed processor
- ◆ Stand-alone operation management settings
- ◆ Supports offline working, and online upgrade
- ◆ TCP/IP network communication
- ◆ Supports self-defined number for eliminating alarm
- ◆ Supports time synchronization via NTP, manual, or automatic method
- ◆ Watchdog design
- ◆ Max. 3000 card number settings, and Max. 10000 event records

APPEARANCE AND INTERFACES

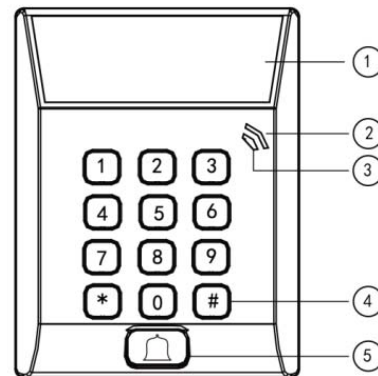

Index	Name	Description
1	LCD Display Screen	First Line: display date, Second Line: display time, Third Line: display authentication information or swiping status
2	Power Indicator	Slow Flicking Green: Card reader is working properly. Solid Green for a period: The operation of pressing keys or swiping card is valid. Solid Red for a period: The operation of pressing keys or swiping card is invalid.
3	Link Indicator	Solid light: Normal, Off: Network Exception
4	Keypad	Numeric key 0 to 9, Clearing key *, and Confirming key #
5	Door Bell	Door Bell Ring