

DS-K2602




DS-K2602	
Processor	32-bit
Capacity	16 MB
Doors Controlled	2
Uplink Communication Interface	TCP/IP, RS-485
Downlink Communication Interface	RS-485, Wiegand (W26/W34)
Storage	Card information: 100,000 (200,000 expandable) Access control events: 300,000 (600,000 expandable)
LED Indicator	Power supply status, communication status, working status
Built-in Clock	Yes
Accessible Card Reader	4 card readers (RS-485 interface), 4 card readers (Wiegand interface)
Input Interface	Alarm input x4, door sensor x 2, exit button x 2, case input x 4 , tamper alarm x 1
Output Interface	Lock relay x 2, alarm relay x 4
Working Temperature	-4° F to 140° F (-20° C to 60° C)
Working Humidity	10% to 90%, non-condensing
Dimensions (L x W x H)	14.6" x 13.6" x 3.5" (370mm x 345mm x 90mm)
Certification	CE, FCC, UL
Working Voltage	12 VDC, 1A
Power Dissipation (w/Load)	≤100W
Power Dissipation (w/o Load)	≤ 4W

FEATURES & NOTES

- ◆ TCP/IP Network Communication, w/Self-Adaptive Network Interface
- ◆ Encrypted Communication Data
- ◆ 100,000 (Expand to 200,000) Card Info, 300,000 (Expand to 600,000) Access Control Events
- ◆ Multi-Door Interlocking, Anti-Passback,
- ◆ Multi-Card, First Card, and Super Password
- ◆ Zone Alarm Input
- ◆ RS-485 and Wiegand Card Reader Interfaces

DIMENSION

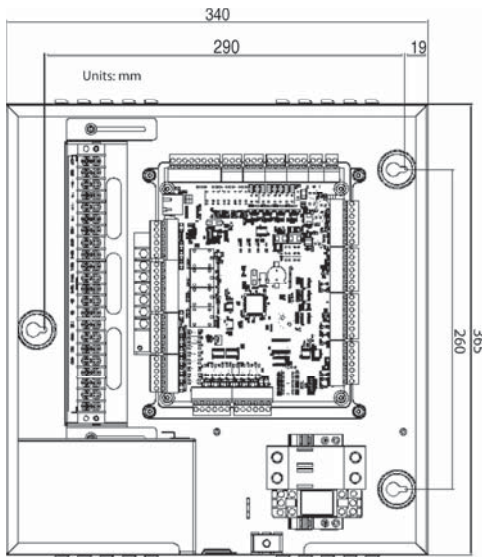

TYPICAL APPLICATION

