

# DS-KAD606-P




## SPECIFICATIONS

DS-KAD606-P	
<b>Network</b>	
Interfaces	Eight 10/100 Mbps interfaces
Interface Type	RJ-45, full/half-duplex, MDI/MDI-X self-adaptive
Standard	IEEE802.3, IEEE802.3u, IEEE802.3x
Processing Type	Storing and forwarding
Flow Control	IEEE802.3x (full-duplex), back pressure (half-duplex)
Priority Queue	4
Maximum VLANs	64
VLAN ID No.	VID1 to VID4094
MAC Address List	8K
Internal Buffer	1 Mbit
<b>General</b>	
Power Supply	24 VDC (power adapter included)
Power Consumption	< 8W
Working Temperature	14° F to 131° F (-10° C to 55° C)
Working Humidity	10% to 90%, non-condensing
Certification	CE, FCC, UL 60950-1
Dimensions (L x W x H)	69.3" x 35.8" x 12.6" (176mm x 91mm x 32mm)

## FEATURES & NOTES

- ◆ Built-in 24 VDC Power Supply
- ◆ Six 10/100 Mbps LAN Ports with Network Cable Power
- ◆ Two 10/100 Mbps Cascading LAN Ports
- ◆ IEEE802.3, IEEE802.3u, IEEE802.3x
- ◆ Storing and Forwarding Function
- ◆ VLAN Technology
- ◆ 1,000,000+ Hours MTBF
- ◆ Wall Mounting Optional

## DIMENSION

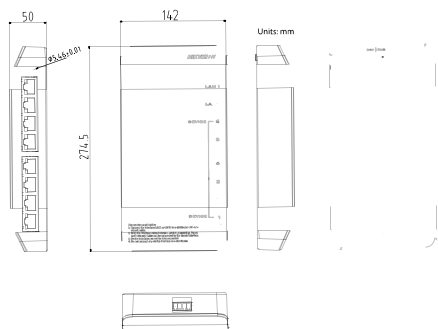

## Typical Application

