



# TA-ETVF6TQ(W/GR)-3.6


## 2MP HD-TVI Fixed Dome Camera



### KEY FEATURES

- 1/2.9" 2.4MP SONY CMOS Sensor
- Effective Pixels: 1920(H) x 1080(V)
- 3.6mm Fixed Lens
- 0.001Lux@F1.2
- 4 in 1 Video Output (AHD / TVI / CVI / CVBS)
- OSD Menu, Can Switch Video Modes
- UTC (Up the Coax.)
- 30fps (NTSC)
- 12VDC

### DIMENSIONS

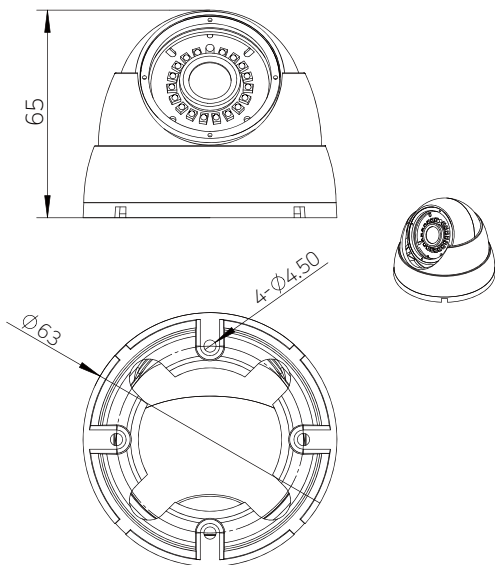

TA-ETVF6TQ-W/G3.6	
Image Sensor	1/2.9" SONY 2.4MP CMOS Sensor
Resolution	1080P, 1920(H) X 1080(V)
Signal System	PAL/NTSC
Lens	3.6mm Fixed Lens
Day & Night	Auto ICR / B&W / Color
Minimum Illumination	-
S/N Ratio	More than 50dB
Synchronous System	Internal
Video Frame Rate	2M@30fps / CVBS (Analog): 1200TVL@30fps
Video Output	TVI / AHD / CVI / CVBS (Analog HD)
D/N Mode	Auto / Color / BW (Black and White)
White Balance	ATW / MWB
BLC	Support
Electronic Shutter	1/60s ~ 1/100,000s
LED	-
IR Distance	20M (60ft)
IR Power On	Photodiode AUTO Control
Power Supply	12VDC 10%
Weather Proof	-
Dimension (mm)	142(W) x 65(H) x 63(D) mm
Weight (g)	400
Operating Conditions	-10°C to 50°C; Humidity: Indoor 85%RH