

TA-AC318-OD4Z


8MP Dome Camera



KEY FEATURES

- 8.29MP High-performance CMOS
- 3840 x 2160 resolution
- Auto Focus
- 2.8 - 12mm Motorized Varifocal Lens
- EXIR 2.0, smart IR,
- Up to 180ft IR distance
- OSD menu, DNR
- 4-in-1 Video Outputs (Switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the Coax (HIKVISION-C)

DIMENSION

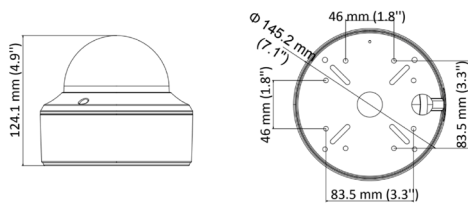

TA-AC318-OD4Z		
Camera	Image Sensor	8.29 megapixel progressive scan CMOS
	Frame Rate	TVI: 8MP@12.5fps, 8MP@15fps, 5MP@20fps, 4MP@25fps, 4MP@30fps, 2MP@25fps, 2MP@30fps CVI: 8mp@12.5fps, 8MP@15fps AHD: 8MP@12.5fps, 8MP@15fps CVBS: 960H P/N
	Resolution	3840(H) x 2160(V)
	Min. Illumination	Color: 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
	Shutter Time	PAL: 1/12.5s to 1/50,000s, NTSC: 1/15s to 1/50,000s
	Lens	2.8-12mm Motorized Varifocal Lens
	Horizontal Field of View	102.2° to 45.6°
	Lens Mount	Φ14
	Day & Night	IR cut filter
	Angle Adjustment (Bracket)	Pan: 0° to 355°, Tilt: 0° to 75°, Rotate: 0° to 355°
	Synchronization	Internal Synchronization
	DWDR	105 dB
Menu	AGC	Yes
	Day/Night Mode	Auto / Color / BW (Black and White)
	White Balance	Auto / Manual
	BLC (Backlight Compensation)	Yes
	DWDR	Yes
	Functions	Brightness, Sharpness, DNR, Mirror, Smart IR, HLC
Interface	Video Output	1 HD analog output
	Switch Button	TVI / AHD / CVI / CVBS
General	Operating Conditions	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensation)
	Power Supply	9V DC to 15V DC -A: 9.6V DC to 14.4V DC; 19.2V AC to 28.8V AC *You are recommended to use one power adapter to supply the power for one camera
	Power Consumption	Max. 6.4W -A: Max. 8.2W
	Protection Level	IP67
	Material	Metal
	IR Range	Up to 60 m (180ft)
	Communication	Up the Coax, Protocol: HIKVISION-C (TVI output)
	Dimensions	Φ 145.2mm x 124.1mm (Φ7.1" x 4.9")
Weight	Approx. 640g (1.41 lb.)	