TA-AC326D-OD4Z

5MP Motorized Varifocal Dome Camera

HD | DWDR | SMART IR | 3 AXIS | Motorized | IP67 | VANDAL | OSD

KEY FEATURES

- 5MP High-performance CMOS
- 2560 x 1944 resolution
- 2.7mm to 13.5mm Motorized Varifocal Lens
- EXIR 2.0, smart IR, up to 40m IR distance
- OSD Menu, 2D-DNR, DWDR
- 4 in 1 Video Output (switchable TVI/AHD/CVI/CVBS)
- IP67, IK10
- Up the Coax (UTC-C)

DIMENSION

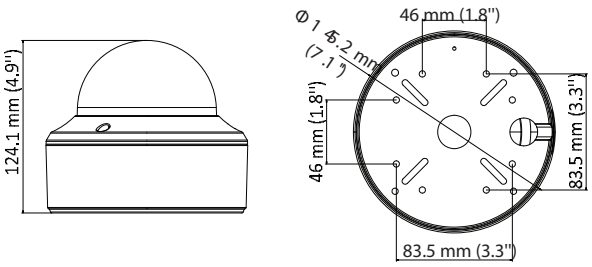

ACCESSORIES

DS-1273ZJ-140B
Wall Mount

TA-AC326D-OD4Z	
Image Sensor	5MP CMOS Image Sensor
Resolution	2560 (H) x 1944 (V)
Min. Illumination	Color: 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25s to 1/50,000s NTSC: 1/30s to 1/50,000s
Lens	2.7mm to 13.5mm motorized varifocal lens
Horizontal Field of View	95.7º to 29.1º
Lens Mount	Φ14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0º to 355º; Tilt: 0º to 75º, Rotate: 0º to 355º
Synchronization	Internal synchronization
Frame Rate	PAL: 5MP@20fps, 4MP@25fps, 1080p@25fps
	NTSC: 5MP@20fps, 4MP@30fps, 1080p@30fps
Video Output	1 HD analog output
White Balance	ATW/MWB
BLC	Support
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
Operating Conditions	-40° to 60°C (-40°F to 140°F)/ Humidity: 90% or less (non-condensing)
IR Distance	Up to 40m
Protection Level	IP67, IK10
Material	Enclosure: Plastic / Main Body: Metal
Power Supply	12VDC±15%, 24VAC±15%
Power Consumption	Max. 6.0W
Communication	Up the coax, Protocol: UTC-C(TVI output)
Dimension (mm)	Φ145.2mm x 124.1mm (Φ7.1” x 4.9”)
Weight (g)	Approx. 655g (1.44 lb.)