

Akuvox A092

Quick Guide

Unpacking

Before you begin using the device, please check the version you got and ensure that the following items are included in the shipped box:

Mainframe Accessories :



A092x1



Installation Stickerx1



Plastic Wall Anchorx3



ST4x20 screwx3



Silicone Pad for Wire Protection x1



Silicon Pad for Power Supply



M3x5 screwx10



Wire Fastenerx3



Glen head x1



Wire harness




Nylon cable tie



M4X30 screw x 2





Screw fixing seat x 6



ST4X20 screw x 6


Akuvox A092

Product Overview

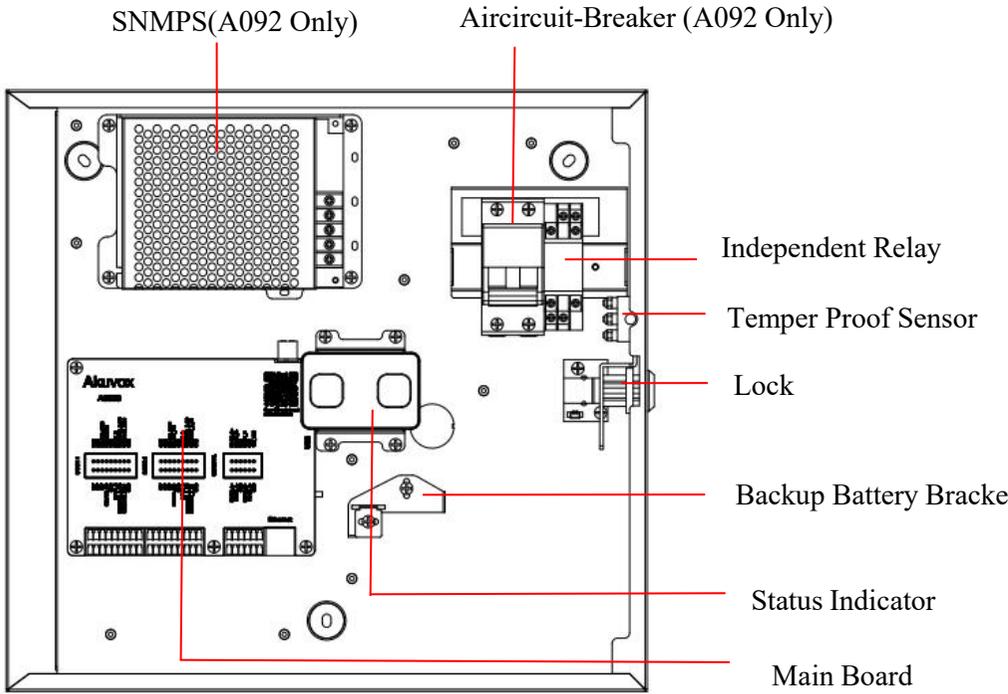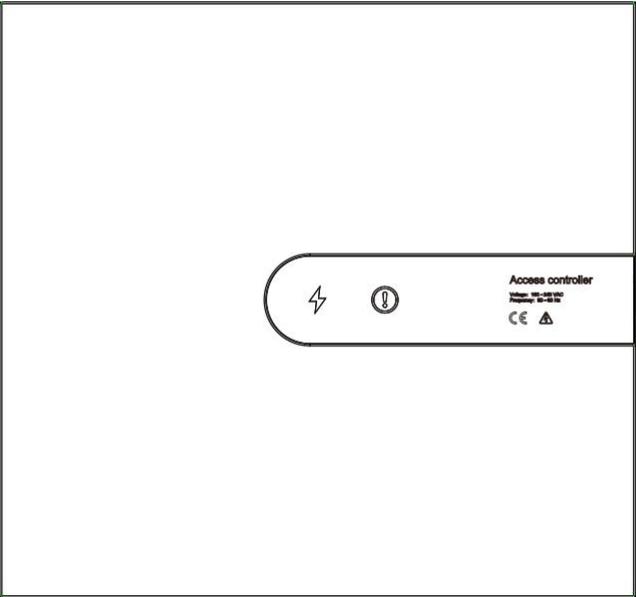


Akuvox A092


Installation




Paste the wall installation sticker on the wall where the equipment needs to be installed. According to the screw hole position on the sticker, use the electric drill to drill the hole with a diameter of 6 and a depth of 25




Install expansion pipe




Fix A092 with 3 ST4*20 screws



Please choose to install Glen head or power cord protection silicone pad according to your needs




Install silicone pad for lead hole




Knock the lead hole with the appropriate tool according to the desired wiring position


Akuvox A092

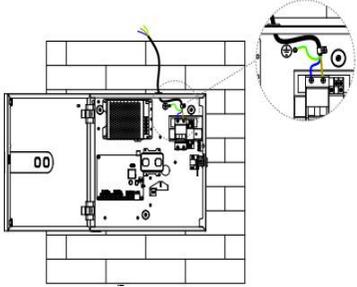

Connect the power cord as shown in the diagram, then it is recommended to use M3X5 screw and wire fastening buckle to fix the power cord to the A092 host machine






About the installation of the battery: place the battery as shown in the drawing, and use the fixing plate and M3X5 screw to fix.



Frontal vector drawing for wiring

Akuvox A092

Device Wiring

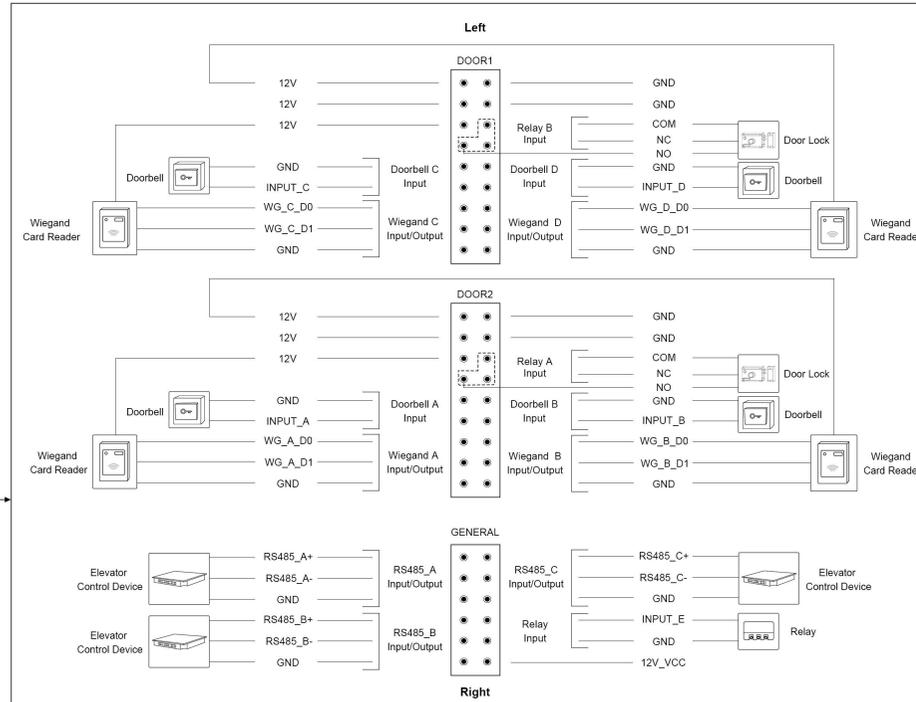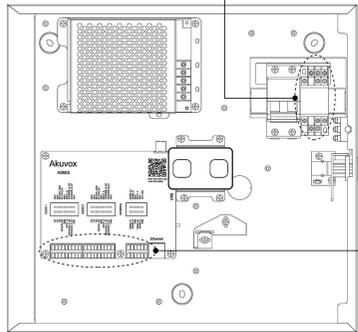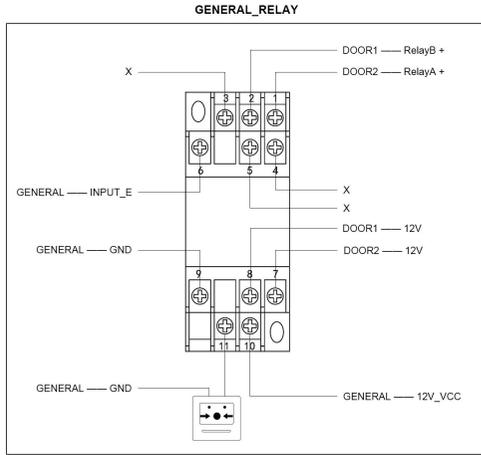

Akuvox A092

Configuration

1. While A092 starts up normally, click Search key in the IP Scanner tool to search the IP address.(Please consult Akuvox Technical Team for IP Scanner tool).
2. Access the Web UI: Input the IP address into browser to configure the phone.

Operation

A092 controller can realize the independent control of two doors; Each door can be connected with an electric lock, 2 card readers (inside and outside) 2 key input and a fire input;

Open the Door

1. After swiping the card on the card reader, A092 will unlock the electronic lock;
2. Press the door button, A092 will unlock the electric lock;

Fire Alarm

When the fire alarm is triggered, A092 will unlock the electronic lock of all doors;

Akuvox A092

Notice Information

Information contained in this document is believed to be accurate and reliable at the time of printing. This document is subject to change without notice, any update to this document can be viewed on Akuvox' s website: <http://www.akuvox.com> © Copyright 2021 Akuvox Ltd. All rights reserved.

