



SPECIFICATIONS

Keypad	Blue black-lit, numeric keys 0-9, functional keys * # , bell
LED Indicator	Blue & Red
ID Card Capacity	1,000 cards
PIN Code Capacity	10 codes
Log Capacity	N/A
Communication	N/A
Standard Functions	Single & dual-factor ID card & password authentication
Access Control Hardware Interface	Connects 3rd party electric strike or magnetic lock, door sensor, exit button, alarm
Wiegand Interface	Wiegand-out port
Power Supply	12V DC, 450mA
Operating Temperature	- 4° F to 122° F
Operating Humidity	20% to 80%
Dimensions (HxWxD)	Model SMK-V 5.35x2.2x0.87 in; Model SMK-H 5x3.15x1.06 in


SMK-V CONFIGURATION

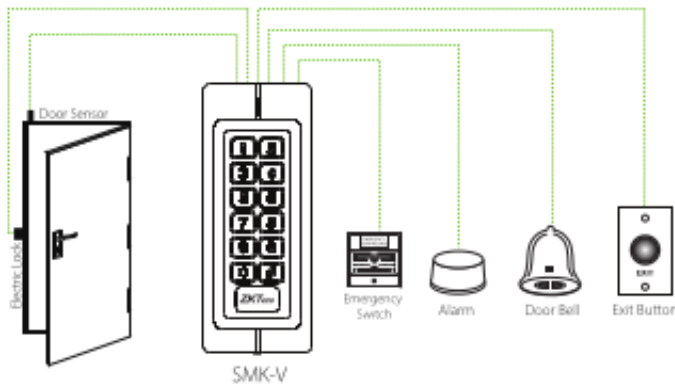


SMK-V DIMENSIONS

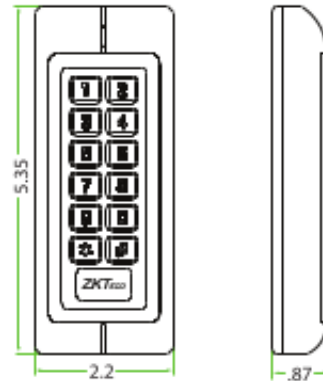

SMK-H CONFIGURATION

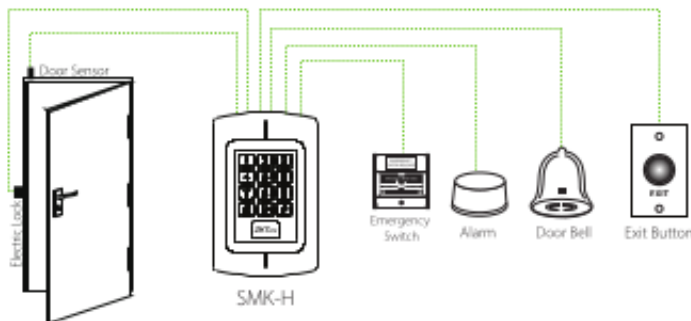

SMK-H DIMENSIONS

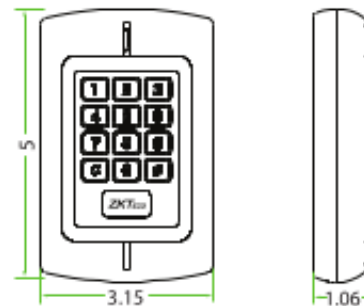

ZKTeco
USA

ISO 9001:2015 certified

1600 Union Hill Rd., Alpharetta GA 30005

Phone: (862) 505 - 2101 • Fax: (862) 204 - 5906 • sales@zktcoua.com • www.zktcoua.com

© Copyright 2019, ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company.

All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners.

All specifications are subject to change without notice. All rights reserved.