

# LED FHD Monitor

## MT-22-V



### Key Features


- True color display
- Resolution is up to at 1920\*1080
- Wide view of field:178°(H)/ 178°(V)
- Specific menu design, which is simple to operate
- Support 7\*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

### Specifications

Model	MT-22-V
Display	
Display Type:	LED Backlight
Screen Size	21.5 inches
Pixel Pitch(H*V)(mm)	0.24825*0.24825
Max Resolution	1920*1080
Brightness (cd/m <sup>2</sup> )	250
Contrast	3000:1

Response Time(ms)	7
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Refresh Rate	60Hz
Interface	
Input	1* VGA、1* HDMI
OSD	
Multi-Language	8 (English, France, Spanish, German, Russia, Korea, Japanese, Simplified Chinese)
Mounting	
VESA(mm)	100*100
Wall-mounted Thread	4-M4 Threaded hole
General	
Power Supply	DC 12V, 2A
Consumption(W)	≤24(on) ≤0.5(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~ 50°C
Storage Humidity	10%~90% (No Condensation)
Dimension (W*H*D)(mm)	508.02*392.87*200.00(With Pedestal)
Package(W*H*D)(mm)	566*382*116
Weight(Kg)	Net Weight:2.3 Gross Weight:3.4
Accessory	
Standard	HDMI Cable、Adapter、Pedestal、Quick Guide
Optional	Hanging Bracket(Model: HB-4022-E)

## Dimensions

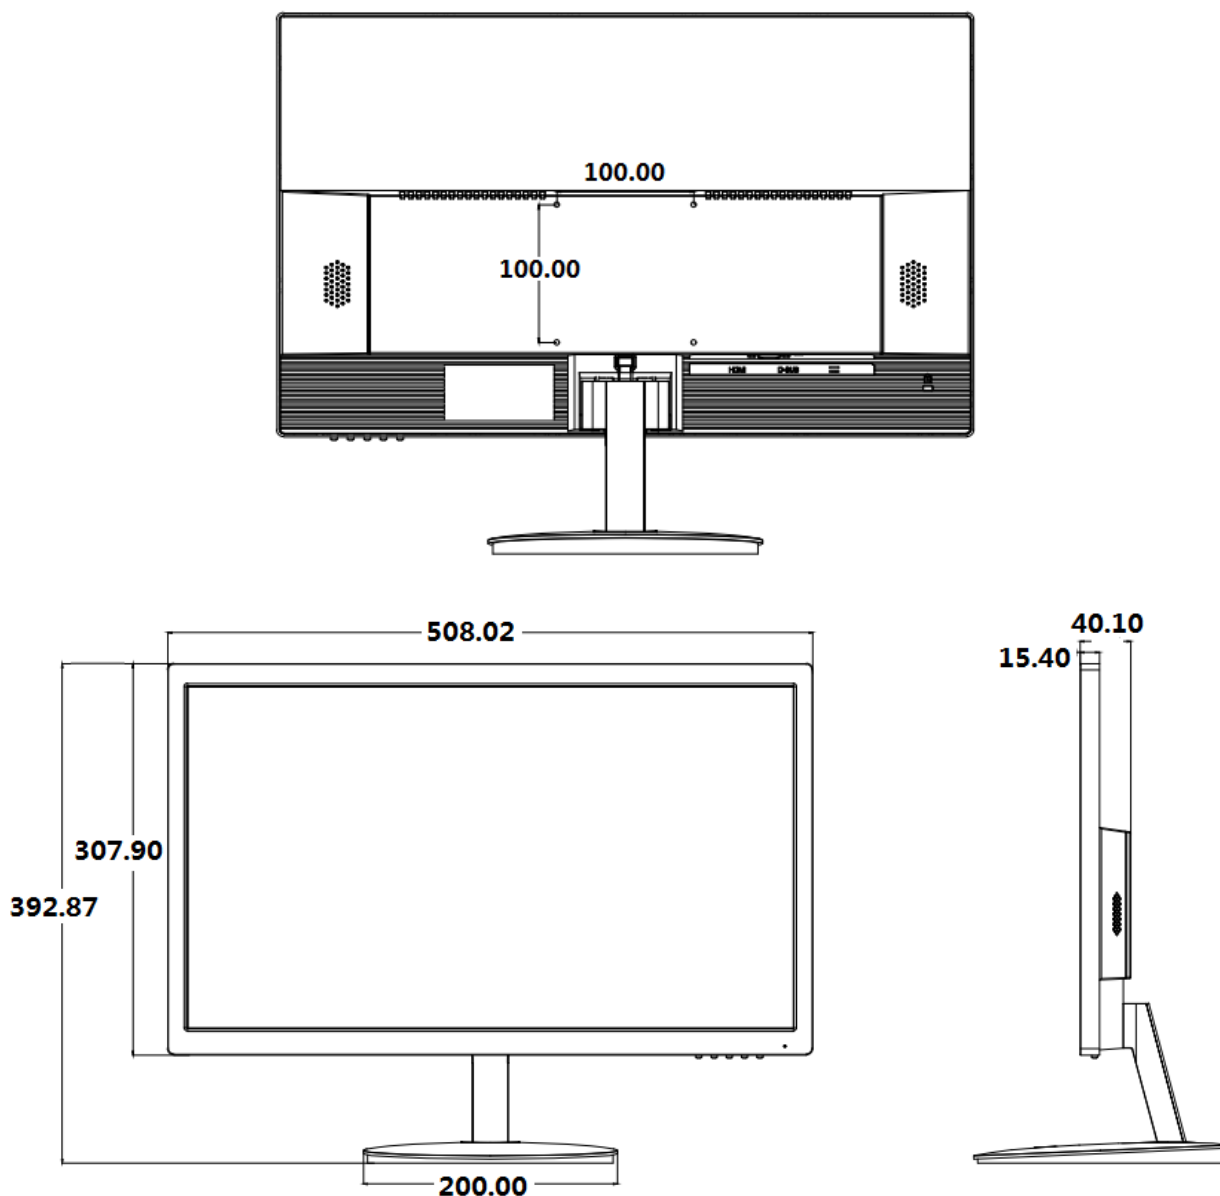

## Interfaces



[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.