


# UNV-Link Pro connect Box


GCB01-B7

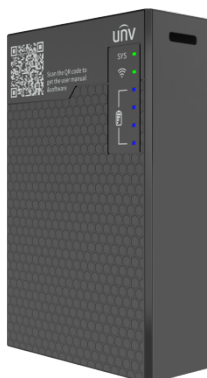

## Specifications

| Interface               | Description                                                                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network                 | 4 x RJ45 10M/100M Base-TX EthernetNetwork Port 1 Support POE (IEEE802.3af) OutputNetwork Port 4 Support PSE Voltage Test                                       |
| Voltage Test            | 1 x PSE Voltage Test(PSE voltage detection Range: 1V~56V; IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt)<br>1 x DC voltage Test(DC voltage detection Range: 1V~56V) |
| Network                 | Description                                                                                                                                                    |
| Wi-Fi                   | 2.4G Wi-Fi (IEEE802.11b/g/n)                                                                                                                                   |
| Structure / Environment | Description                                                                                                                                                    |
| Battery Capacity        | 18650 lithium battery, 7500mAH                                                                                                                                 |
| Power Input             | 1 x DC 5V/2A max, type-c                                                                                                                                       |
| Power Output            | 1 x DC 12 V/1 A output; 1 x DC 5 V/1 A output, type-A                                                                                                          |
| General                 | Description                                                                                                                                                    |
| LED Indicator           | System indicator, WiFi indicator, Battery indicator                                                                                                            |
| Dimensions              | 130 × 85 × 33mm (5.1" × 3.3" × 1.3" ) (L x W x H)                                                                                                              |
| Working Environment     | -20 °C ~ 60 °C (-4 °F ~ 140 °F), Humidity: ≤95% RH (non-condensing)                                                                                            |
| Reset Button            | Support                                                                                                                                                        |

## Dimensions

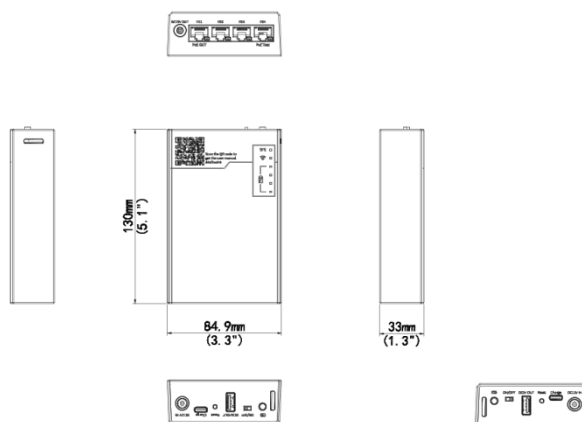

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.