

Ceiling IP Speaker 15W

IPS301015-S



Features


- Built in 1 high-quality speaker with loud sound, long penetration and clear
- Support alarm broadcast with uniview NVR, video and audio linkage.
- Built in storage, support uploading custom audios
- Support two-way audio
- Support PoE power supply

Specifications


| | |
|--------------------------|-----------------------------------------------------------------|
| Model | IPS301015-S |
| Speaker | |
| Rated Power | 15 W |
| Max. Acoustic Pressure | 100 dB SPL |
| Frequency Response | 100 Hz to 15 kHz |
| Impedance | 8 Ω |
| Material | |
| Material | Metal |
| Network | |
| Network Protocol | IPv4, HTTP, HTTPS, SSL/TLS, DNS, TCP, UDP, DHCP, UPnP, ARP, SSH |
| Interface Protocol (API) | ONVIF, RTSP, RTP, LAPI |
| Browser | Firefox 87+, Chrome 90+, Edge 90+, Safari 17+ |
| Build in Mic | |
| Amount | 1 |
| Frequency Response | 100 Hz to 8 kHz |

| | |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sensitivity | -37 dBV/Pa |
| Sampling Rate | 8 kHz |
| Quantization Bits | 16 bit |
| Audio | |
| Broadcast | Regular Broadcast, Live Broadcast, Alarm Broadcast |
| Two-Way Audio | Support |
| Audio Compression | G.711U |
| Audio File Format | MP3, WAV |
| Audio File Size | 2 KB ≤ Audio File Size ≤ 10 MB |
| Audio File Storage | 64 MB |
| Audio File Number | 100 (Include system built-in files) |
| Language | |
| Language | 38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian |
| Interface | |
| Network Interface | 1 RJ45 10 M/100 M self adaptive Ethernet Interface |
| Audio In | RCA (only be used for sound amplification, cannot be used for intercom) |
| Alarm In | 2 |
| Power Supply | PoE (IEEE 802.3af), DC 12 V/1.4 A |
| Working Environment | |
| Working Temperature | -10 °C to 50 °C (14 °F to 122 °F) |
| Working Humidity | ≤ 90% RH (non-condensing) |
| Dimensions | |
| Dimensions | Φ200mm × 95mm (Φ7.9"×3.7") (Hole size: 180mm) |

Dimensions

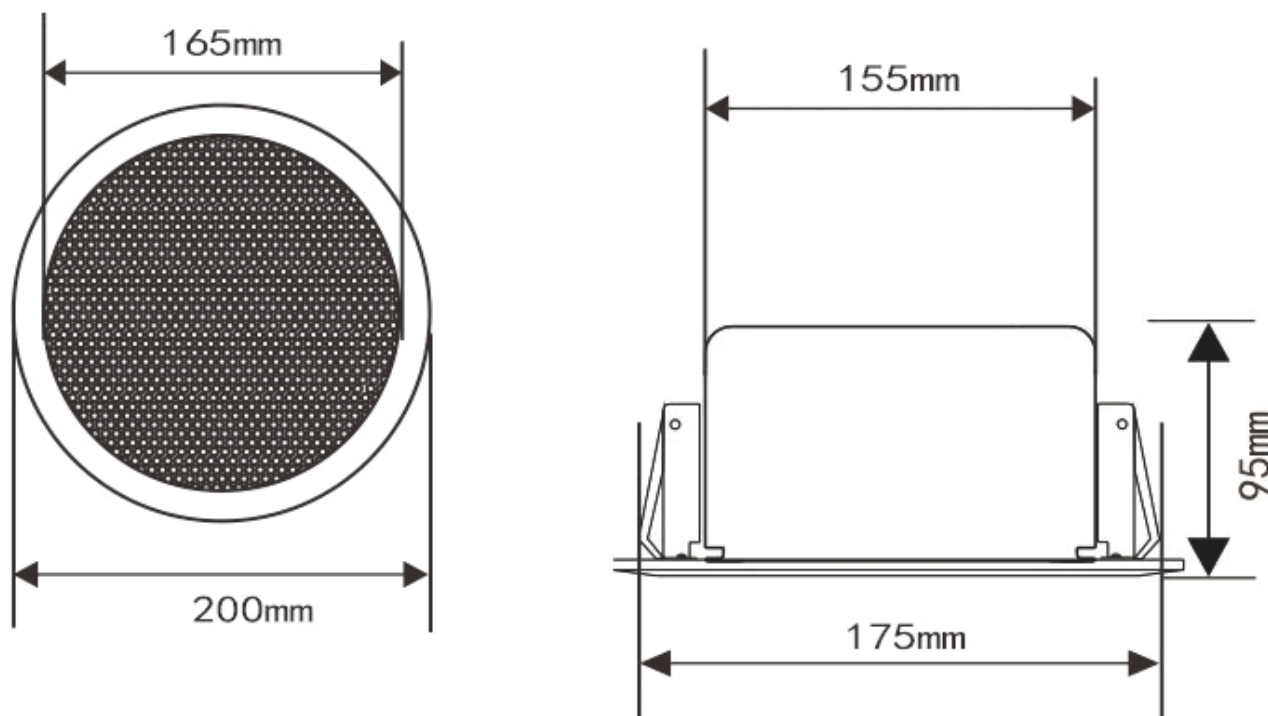

Cable Interface

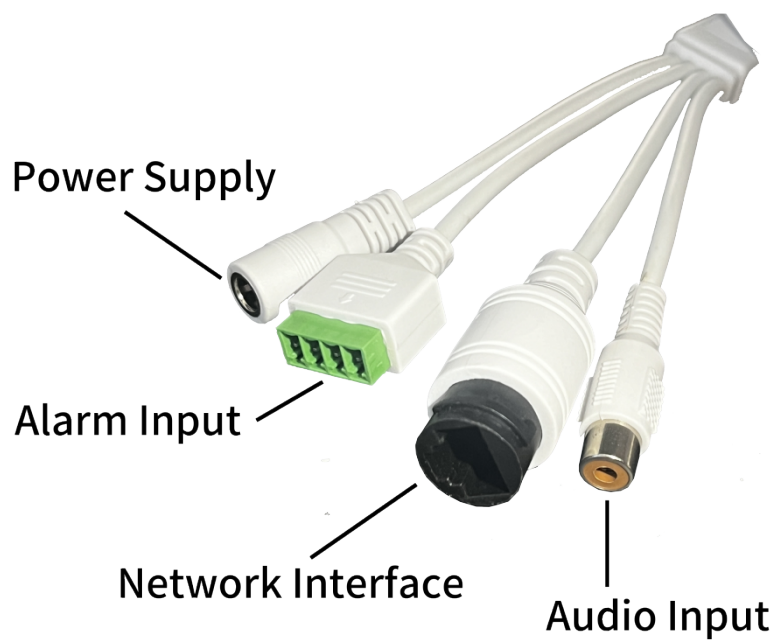

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.