

OEA-ML22- 280 Double Door Magnetic Lock (280KG)

OEA-ML22-280



Overview

OEA-ML22-280 is a magnetic lock with 280kg holding force designed for double doors, which is made of high-strength aluminum alloy and suitable for wooden doors, glass doors, iron doors, security doors, etc. It features fine workmanship, high solidity, strong suction, low power consumption, high reliability, high stability and sensitivity, easy installation, and eco-friendliness.

Features

- 280kg holding force.
- MOV surge protection.
- No residual magnetism, abrasion resistant.
- Solid aluminum alloy housing.
- Double-insulated lock body.

- Tamper-proof screws, stable and safe.


Specifications

| Hardware Specification | Description |
|------------------------|---|
| Power Supply | DC12V/DC24V |
| Operating current | 460mA*2 |
| Standby current | 460mA*2/230mA*2 |
| Security type | Failsafe |
| Operating environment | Operating temperature: -30° C to +60° C; operating humidity: ≤95% |
| Weight | 4kg |
| Dimensions (L x W x H) | Lock housing:500×47.7×27.5; armature plate: 180×38×11.7 |
| Door support | Wooden door, glass door, metal door, etc. |
| Attestation | CE/FCC/ROHS |

Ordering Info

| Product Model | Description |
|---------------|--|
| OEA-ML22-280 | Double Door Electromagnetic Lock 280KG |

Dimensions

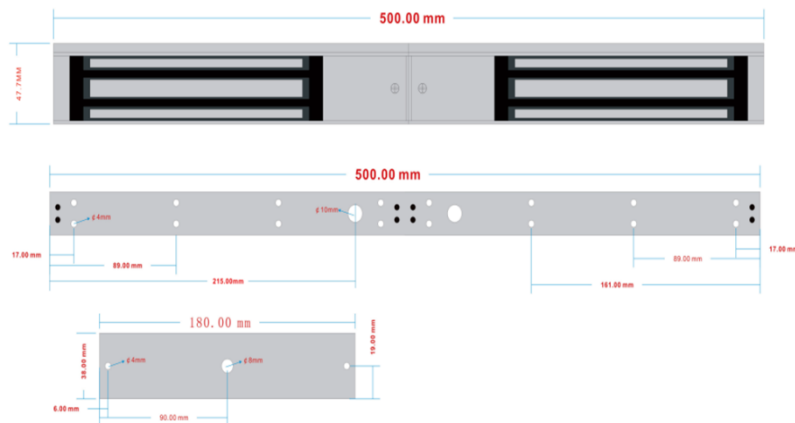

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.