

# 4MP LPR Bullet Camera (8 to 32mm, PoE, H.265, warm light(IR))

PKC2640@Z80(-IR)-P




## Specifications

|                         |  |               |
|-------------------------|--|---------------|
| Model                   | PKC2640@Z80-IR-P   | PKC2640@Z80-P |
| Camera                  |  |               |
| Sensor                  | 1/1.8-inch 4MP CMOS  |               |
| Focal length            | 8 to 32mm  |               |
| Shutter                 | Auto/Manual, range: 1/30 to 1/100000s  |               |
| Minimum illumination    | 0.002lux (F1.7)  |               |
| FOV                     | Horizontal FOV: 42.4° to 15.9°,<br>Vertical FOV: 23.9° to 9.8°,<br>Diagonal FOV: 52.5° to 17.8°  |               |
| WDR                     | 120 dB   |               |
| Image                   |  |               |
| Image collection format | 2688*1520@30 (default), 2688*1520@25   |               |
| Frame rate              | 30 (default), 25, 22, 20, 18, 16, 15, 12.5, 10, 8, 6, 5, 4, 3, 2, 1  |               |
| Video compression       | H.264 (default), H.265   |               |
| ROI                     | Supports up to 8 regions   |               |
| Video OSD               | Supports 8 overlay areas and allows contents including date, time, date&time, zoom ratio, custom contents  |               |
| Image OSD               | Supports 8 overlay areas and allows contents including time, license plate number, device ID, camera ID, allowlist, image authentication ID, custom contents (3 items), location |               |
| Display Parameters      |  |               |

|                                  |   |   |
|----------------------------------|---|---|
| Resolution                       | Main stream: 2688*1520, 1080P (default), 720P, D1; Sub stream: 720P (default), D1, 2CIF, CIF; Third stream: D1 (default), 2CIF, CIF   |   |
| Smart                            |   |   |
| Application scenario             | ≤ 80km/h for regular roads;<br>Camera with the focal length of 8 to 32mm can be used for regular roads  |   |
| Vehicle detection mode           | Supports video detection  |   |
| License plate number recognition | Supports recognition of license plates with numbers and letters by default  |   |
| List configuration               | Supports allowlist and blocklist configuration, each list allows 20,000 items<br>Supports import, export, add, and delete operations  |   |
| Barrier opening policy           | Open barrier only for the recognized vehicles<br>Open barrier for all vehicles<br>Open barrier only for vehicles on the allowlist<br>Open barrier for vehicles not on the blocklist<br>Configurable Boolean output ID |   |
| Storage                          |   |   |
| Edge storage                     | Supports ANR with a Micro SD card, up to 256GB  |   |
| Structure                        |   |   |
| Illumination                     | Built-in integrated illumination module, including 4 IR LEDs, 50m illumination distance, automatic on/off control   | Built-in integrated illumination module, including 4 warm light LEDs, 50m illumination distance, automatic on/off control |
| Bracket                          | 3-axis mounting bracket   |   |
| Junction box                     | The camera comes with a junction box for storing tail cable   |   |
| Interface                        |   |   |
| BNC                              | PAL,NTSC  |   |
| Network interface                | 1×10M/100M RJ45   |   |
| Serial port                      | 1 × RS485   |   |
| Boolean output                   | 1 relay output, withstand voltage: AC 125V/0.3A, DC 30V/1A  |   |
| Boolean input                    | 2 x input, supports level (up to DC 5V) and switch signal   |   |
| Audio interface                  | 1 × audio input, 1 × audio output   |   |
| Storage interface                | 1 × Micro SD card slot  |   |
| Reset button                     | Support   |   |
| Network                          |   |   |
| Protocols                        | IGMP,IPv6,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTSP,DNS,DDNS,NTP,UPnP,HTTP,HTTPS,802.1x,SNMP,QoS,SSL/TLS,SSH,IPv4  |   |
| Compatible Integration           | ONVIF (Profile S, Profile G, Profile T),SDK, API  |   |
| General                          |   |   |
| Weight                           | 2.1kg   |   |
| Ingress protection               | IP67, IK10  |   |

|                          |   |
|--------------------------|---|
| Power supply             | DC12V + 25% - 10%<br>Max. power consumption: 20W<br>Supports PoE (802.3at, class 4)   |
| Dimensions<br>(L×W×H)    | 406mm x 126mm x 130mm   |
| Operating<br>environment | -40°C to 60°C, ≤90% RH  |
| Heater                   | N/A   |
| Compliance               |   |
| NDAA Compliant           | Support   |
| Certification            |   |
| EMC                      | CE-EMC (EN 55032:2015+A11:2020+A1:2020, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC 61000-3-2:2019+A1:2021, EN 50130-4:2011+A1:2014)<br>FCC(FCC CFR 47 part15 B, ANSI C63.4 2014) |
| Safety                   | EN IEC 62368-1:2020+A11:2020<br>UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)  |
| Environment              | CE-RoHS (2011/65/EU;(EU)2015/863);WEEE (2012/19/EU)   |
| Protection               | IP67(IEC60529:1989+AMD1:1999+AMD2:2013)<br>IK10(IEC 62262:2002+AMD1:2021)   |

## Dimensions

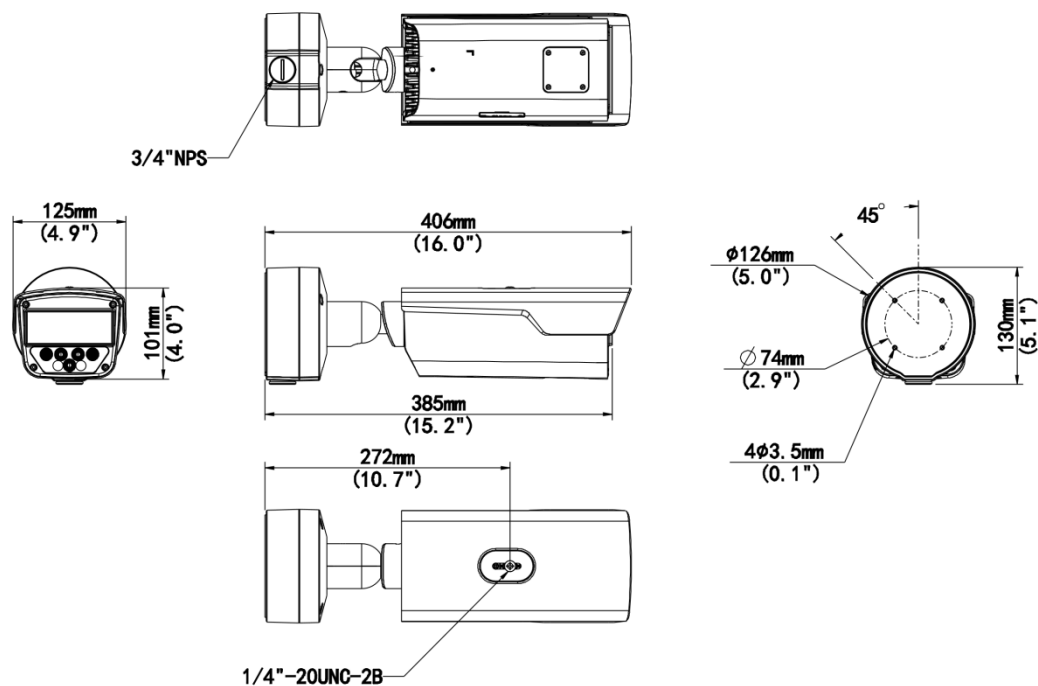

## Accessories

TR-UP06-C-IN

Pole Mounting Bracket for Bullet Junction

Box Only



## Ordering Info

| Product Model | Config   | Description   |
|---------------|----------|---|
| PKC2640       | Z80-P    | 4MP LPR Bullet Camera (8 to 32mm, PoE, H.265, warm light) |
|               | Z80-IR-P | 4MP LPR Bullet Camera (8 to 32mm, PoE, H.265, IR)         |

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.